


GROUTS

CONBEXTRA®

Please always refer to the product TDS before making your final selection or speak to your Fosroc representative.

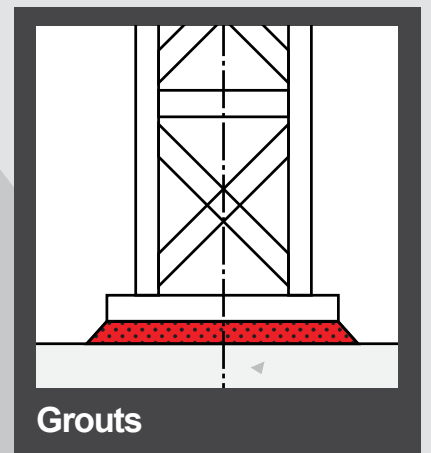

CEMENTITIOUS GROUTS





Fosroc cementitious grout range is respirable crystalline silica (RCS) hazard free*, meaning you will not be exposed to RCS when mixing the powder with water.

**Not hazardous in accordance with Australian Inventory of Industrial Chemicals. Contains <0.1% RCS.*

Fosroc Construction Grout

Construction Grout is a general purpose shrinkage compensated (Class A) cementitious, flowable or trowellable grout for gap thicknesses from 10mm up to 100mm.



Typical applications: General site grouting and precast panel erection.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC501000-20KG	CONSTRUCTION GROUT 20KG	20KG	10.8L	50	 9330221006590

Fosroc Conbextra GP

Conbextra GP is a general purpose shrinkage compensated (Class A) cementitious, flowable or trowellable grout for gap thicknesses from 10mm up to 100mm. Conbextra GP has a 28 day compressive strength of 65 MPa when mixed at trowellable consistency.





Typical applications: General site grouting where higher compressive strength is required.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC501020-20KG	CONBEXTRA GP 20KG	20KG	10.8L	50	 9330221006569

Fosroc Conbextra C

Conbextra C is a dual shrinkage compensated, high flow cementitious grout for gap thicknesses from 10mm up to 100mm. Conbextra C can be used as a flowable or trowel applied grout.



Typical applications: Under baseplates and other applications where a precision high flow grout is required.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
ONLY AVAILABLE IN AUSTRALIA					
 FC501040-20KG	CONBEXTRA C 20KG	20KG	10.8L	50	 9330221006545
ONLY AVAILABLE IN NEW ZEALAND					
 FC500587-20KG	CONBEXTRA C 20KG	20KG	10.8L	50	 9300611679666

Fosroc Conbextra HF

Conbextra HF is a dual shrinkage compensated high flow cementitious precision grout for gap thicknesses up to 125mm. Conbextra HF has excellent flow retention properties.



Typical applications: Precision grouting where high flow and long flow property retention is required.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC501050-20KG	CONBEXTRA HF 20KG	20KG	10.8L	50	 9330221006538

Fosroc Conbextra HS

Conbextra HS is a dual shrinkage compensated, high flow cementitious grout used grouting applications where rapid strength gain and high ultimate strength is a pre-requisite. Compressive strength of 26 MPa @ 8 hours and 95 MPa @ 28 days when mixed at flowable consistency.



Typical applications: Grouting machine bases where quick back to service is required and/or high ultimate compressive strength.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC502000-20KG	CONBEXTRA HS 20KG	20KG	9.8L	50	 9330221006460

Fosroc Conbextra HES

Conbextra HES is a shrinkage compensated cementitious grout used for free flow grouting in a wide range of applications where rapid strength gain is a pre-requisite. Conbextra HES has a compressive strength of 25 MPa @ 2 hours when mixed at flowable consistency.





Typical applications: Grouting machine bases where very quick return to service is required.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC501060-20KG	CONBEXTRA HES 20KG	20KG	10.2L	50	 9330221006514

Fosroc Conbextra Deep Pour

Conbextra Deep Pour is a high flow, dual shrinkage compensated cementitious grout for grouting applications ranging from 20mm up to a maximum of 500mm deep.



Typical applications: Grouting applications where deep sections up to 500mm exist.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC501070-20KG	CONBEXTRA DEEP POUR 20KG	20KG	10.0L	50	-	-	 9330221006507
 FC501070-1000KG	CONBEXTRA DEEP POUR 1000KG MTO	1000KG	500L	1	2	14-21	 9300611586636

Fosroc Conbextra UW

Conbextra UW a flowable under water cementitious grout which exhibits exceptional resistance to washing-out of the cement phase when placed in stationary or moving water.



Typical applications: Grouting or concrete reinstatement in submerged conditions such as wharf piles.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	BARCODE
 FC501030-20KG	CONBEXTRA UW 20KG	20KG	11.6L	50	 9330221006552

Fosroc Conbextra CB

Conbextra CB is a highly flowable high strength grout which can be used for various void fill applications including; backfilling behind concrete tunnel segments and bottom up cable bolt grouting applications.



Typical applications: Grouting cable bolts and back filling tunnel segments.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC501087-20KG	CONBEXTRA CB 20KG MTO	20KG	12 - 13.3L	48	75	14-21	 9300611643483

Fosroc Conbextra CB-C


Conbextra CB-C is a Class A/ Class C, dual shrinkage compensated, highly flowable and high strength grout. It can be used for various void fill applications including, backfilling behind concrete tunnel segments, bottom up cable bolt grouting applications and general civil applications.

Typical applications: Tunnel segments, Bottom up cable bolting applications and General civil applications.

PRODUCT CODE	DESCRIPTION	SIZE	YIELD (FLOWABLE)	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC501088-20KG	CONBEXTRA CB-C 20KG	20KG	12 -13L	48	75	-	 9300611643483


Fosroc Renderoc BB

Renderoc BB is a high strength gain, low shrinkage mortar for the installation of elastomeric bridge bearings.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC300250-20KG	RENDEROC BB 20KG	20KG	50	 9330221006606



Fosroc Conbextra Grout Aggregate

Conbextra Grout Aggregate are chemically inert fillers (<5mm) for use with Conbextra EP65 and Conbextra Cementitious Grouts to improve yield and allow deeper pours to be achieved.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC502021-20KG	CONBEXTRA GROUT AGGREGATE 20KG	20KG	50	 9330221006446



Fosroc Conbextra BB92

Conbextra BB92 is an ultra-high performance cementitious grout specifically designed for structural grouted connections for wind turbine foundations and oil and gas installations.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC524478-25KG	CONBEXTRA BB92 25KG MTO	25KG	40	800 BAGS	90	 9300611616500

Fosroc Conbextra TA

Conbextra TA is a cementitious grout, formulated for grouting the structural transition pieces of on-shore wind turbine foundations. Suitable for gap depths in the range of 50 to 250 mm. Conbextra TA complies EN1504-6:2006.




PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC524476-25KG	CONBEXTRA TA 25KG MTO	25KG	40	800 BAGS	90	 9300611616449

EPOXY GROUTS

Fosroc Conbextra EP10

Conbextra EP10 is a low viscosity epoxy grout for grouting small gaps (<10mm) between a base plate and substrate. Conbextra EP10 can be used to fill hairline cracks in concrete slabs and for anchoring applications.





Typical applications: Grouting small gaps (<10mm) under baseplates and as a crack repair material. Ideal for anchoring vertical starter bars and other vertical anchoring applications such as hold down bolts.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
CONBEXTRA EP10 300ML PACK							
 FC523125-200ML	CONBEXTRA EP10 BASE 200ML	300ML PACK	20	504	-	-	 9300611620941
 FC523124-100ML	CONBEXTRA EP10 HARDENER 100ML		15	504	-	-	 9300611620958
CONBEXTRA EP10 1.5L PACK							
 FC523125-1L	CONBEXTRA EP10 BASE 1L	1.5L PACK	4	256	-	-	 9300611620965
 FC523124-500ML	CONBEXTRA EP10 HARDENER 500ML		32	504	-	-	 9300611621092
CONBEXTRA EP10 15L PACK							
 FC523125-10L	CONBEXTRA EP10 BASE 10L MTO	15L PACK	-	48	10	14-21	 9330221006224
 FC523124-5L	CONBEXTRA EP10 HARDENER 5L MTO		-	72	10	14-21	 9330221006231

Fosroc Conbextra EP65 Plus

Conbextra EP65 Plus is an ultra high strength (125 MPa), 2 component epoxy grout. It is designed for use as a precision, heavy duty grouting for gaps between 10mm and 100mm. Conbextra EP65 Plus can also be used for anchoring applications.





Typical applications: Grouting under baseplates, crane rails turbines where heavy dynamic loads are encountered and areas where chemical spillage may occur. Ideal for anchoring vertical starter bars and other vertical anchoring applications such as hold down bolts.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
CONBEXTRA EP65 PLUS 14L PACK				
 FC524460-11.5L	CONBEXTRA EP65 PLUS BASE 11.5L	14L PACK	32	 9330221153805
 FC524470-2.5L	CONBEXTRA EP65 PLUS HARDENER 2.5L		108	 9330221153812

Fosroc Conbextra EP120

Conbextra EP120 is a 2 component epoxy grout for use in situations where heavy dynamic or mobile loads are encountered with gaps up to 120mm. Also for use in conditions where chemical spillage may be encountered.







Typical applications: Grouting reciprocating machinery, heavy crane and transporter rails, high speed turbines, centrifuges and drop forges.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
CONBEXTRA EP120 14L PACK				
 FC522333-11.3L	CONBEXTRA EP120 BASE 11.3L	14L PACK	32	 9330221006316
 FC522444-2.7L	CONBEXTRA EP120 HARDENER 2.7L		108	 9330221006293

Fosroc Conbextra EP300 DP

Conbextra EP300 DP is a 3 component epoxy grout for use in applications where heavy dynamic or mobile loads are encountered with gaps up to 300mm. Particularly well suited to applications where long working time and/or large volume grouting is required.

Typical applications: Grouting reciprocating machinery, heavy crane and transporter rails, high speed turbines, centrifuges and drop forges. Also used for pile head waterproofing.





PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE	
CONBEXTRA EP300 DP 11.4L PACK					
	FC500547-2.7L	CONBEXTRA EP300 DP BASE 2.7L	11.4L PACK	108	 9300611547033
	FC500545-860ML	CONBEXTRA EP300 DP HARDENER 860ML		360	 9300611547040
	FC500546-20KG	CONBEXTRA EP300 DP FILLER 20KG		50	 9300611562586

GROUTS

Fosroc Conbextra EP935

Conbextra EP935 is a flowable epoxy grout suitable for underwater grouting work and for the repair of water immersed concrete structures.

Typical applications: Wharf and bridge piles

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE	
CONBEXTRA EP935 8.4L PACK							
	FC520010-6.65L	CONBEXTRA EP935 BASE COMPONENT 6.65L MTO	8.4L PACK	32	63	14-21	 9330221006361
	FC520015-1.75L	CONBEXTRA EP935 HARDENER COMPONENT 1.75L MTO		32	63	14-21	 9330221006354

WATER- PROOFING

EARTH SHIELD® · HYDROTITE® · LEAKMASTER®
NITOBOND™ · NITOPROOF™ · PROOFEX®
SUPERCAST® · SUPERSWELL®

Vandex®

Please always refer to the product TDS before making your final selection or speak to your Fosroc representative.















PRE-APPLIED SHEET MEMBRANE

Fosroc Proofex Engage

Proofex Engage is a unique patented waterproofing membrane system comprising of a cell mesh bonded to a blended polyethylene/polypropylene membrane which allows poured concrete to interlock, forming a tenacious mechanical bond.









Typical applications: Basement walls and foundations

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC007070-UNIT	PROOFEX ENGAGE 1.27 X 30M	1.27M X 30M ROLL	 9330221149266
	FC007071-UNIT	PROOFEX ENGAGE DETAIL STRIP 10M	200MM X 1.5MM X 10M STRIP	 9330221149259
	FC007072-UNIT	PROOFEX EXT CORNER	125MM X 125MM X 125MM	 9330221149242
	FC007073-UNIT	PROOFEX INTERNAL CORNER	125MM X 125MM X 125MM	 9330221149235
	FC007077-UNIT	PROOFEX L SECTION	125MM X 125MM X 10M	 9330221155526
	FC007078-UNIT	PROOFEX TOP HAT	110MM - 330MM X 330MM	 9300611612748
	FC007079-UNIT	PROOFEX TOP HAT	160MM - 360MM X 360MM	 9300611612755

Fosroc Proofex PGP

Proofex PGP is a flexible PVC synthetic membrane that provides a continuously loose laid or fully bonded waterproofing system.


Typical applications: Tunnels, basements, podiums and green roofs.

	PRODUCT CODE	DESCRIPTION	SIZE	MOQ	BARCODE
	FC007100-UNIT	FOSROC PROOFEX PGP MEMBRANE	2MM X 2.1M X 25M	1	 9300611643957
	FC007101-UNIT	FOSROC PROOFEX PGP - FITTER	80MM	100	 9300611643971
	FC007102-UNIT	FOSROC PROOFEX PGP - INJECTION FLANGE	180MM	10	 9300611643964
	FC007103-UNIT	FOSROC PROOFEX PGP - SLEEVE		30	 9300611643988

SELF-ADHESIVE WATERPROOFING MEMBRANES



Fosroc Proofex 3100

Proofex 3100 is a self adhesive bituminous membrane incorporating a cross laminated HDPE film used in substructures, basements, retaining walls and tunnels.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007067-UNIT	PROOFEX 3100 1.5MM X 1M X 20M ROLL	1.5MM X 1MM X 20M ROLL	16	 9300611612373

Fosroc Proofex 6100

Proofex 6100 is a woven polypropylene surfaced, bituminous self adhesive membrane used to waterproof bridge decks, car parks, ramps, and road pavements where the membrane will be overlaid with bitumen..

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007068-UNIT	PROOFEX 6100 1.65MM X 1M X 20M ROLL	1.65MM X 1M X 20M ROLL	16	 9300611612380



WATERPROOFING

DRAINAGE CELLS AND PROTECTION BOARDS

Fosroc Proofex Sheetdrain 81

Proofex Sheetdrain 81 is a high-density polyethylene (HDPE) dimpled drainage membrane used for the protection and drainage of waterproofing membranes used on foundations which are subsequently backfilled.



Typical applications: Draining below ground waterproofing applications.

PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
 FC043073-UNIT	PROOFEX SHEETDRAIN 81	2M X 20M ROLL	 9300611582881

Fosroc Proofex Protection Board PP



Proofex Protection Board PP is a 3mm thick polypropylene, impact resistant membrane protection board. It is designed to give impact, puncture and damage resistance to membrane systems.

Typical applications: Protection of waterproofing membranes from backfilling materials.

PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
 FC071079-UNIT	PROOFEX PROTECTION BOARD PP	1.83M X 3MM X1.22M ROLL	 9330221148238



Fosroc Proofex Torchseal A300

Proofex Torchseal A300 is a polyester fabric backed base sheet for heat sensitive substrates in multilayer torch-on bitumen membrane systems.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC007010-UNIT	PROOFEX TORCHSEAL A300	20 X 1M ROLL	20	 9300611616135



Fosroc Proofex Torchseal A350

Proofex Torchseal A350 is a self-adhesive 3 mm thick base sheet for heat sensitive substrates in multilayered torch on bitumen membrane systems.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC007009-UNIT	PROOFEX TORCHSEAL A350	10 X 1M ROLL	20	 9300611617019



Fosroc Proofex Torchseal A400

Proofex Torchseal A400 is a perforated reinforced base sheet to relieve water vapour pressure from under multi-layer torch-on bitumen membrane systems.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC007011-UNIT	PROOFEX TORCHSEAL A400	30 X 1M ROLL	25	 9300611616142

Fosroc Proofex Torchseal A500

Proofex Torchseal A500 is a torch applied 3.5mm thick, reinforced elastoplastomeric polymer – bitumen waterproofing membrane.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC007012-UNIT	PROOFEX TORCHSEAL A500	10 X 1M ROLL	23	 9300611616159



Fosroc Proofex Torchseal A600

Proofex Torchseal A600 is a torch applied 3mm thick, reinforced polymer – bitumen waterproofing membrane. Used as a continuous waterproofing membrane for foundations, basements and tunnels, particularly as the base layer of multi-layer systems.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007013-UNIT	PROOFEX TORCHSEAL A600	10 X 1M ROLL	25	 9300611616166



Fosroc Proofex Torchseal A625

Proofex Torchseal A625 is a torch applied 4.5mm thick, mineral finish, reinforced polymer – bitumen waterproofing membrane. Used as the top layer in a two layer membrane system or as a single roof membrane.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007014-UNIT	PROOFEX TORCHSEAL A625	10 X 1M ROLL	20	 9300611616173



Fosroc Proofex Torchseal A700

Proofex Torchseal A700 is a torch applied 4.5mm thick, 'plant root repellent' membrane, reinforced with rot-proof single strand non-woven polyester fabric. Applied as the final waterproofing layer in contact with earth for gardens, foundations, underground structures and tunnels covered with soil where there is a risk of the system being attacked by roots.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007015-UNIT	PROOFEX TORCHSEAL A700	10 X 1M ROLL	20	 9300611616180



Fosroc Proofex Torchseal A800

Proofex Torchseal A800 is a torch applied 4mm thick, reinforced elastoplastomeric polymer – bitumen waterproofing membrane used as a continuous waterproofing membrane for foundations, basements and tunnels.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007016-UNIT	PROOFEX TORCHSEAL A800	10 X 1M ROLL	20	 9300611616197



Fosroc Proofex Torchseal A825

Proofex Torchseal A825 is a torch applied, 4.5kg/m², mineral finish, reinforced polymer – bitumen waterproofing membrane used as a continuous waterproofing membrane for roofs and other UV exposed areas. May be used as the top layer in a two layer membrane system or as a single roof membrane.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007017-UNIT	PROOFEX TORCHSEAL A825	10 X 1M ROLL	20	 9300611616203



Fosroc Proofex Torchseal A900

Proofex Torchseal A900 is a torch applied 5mm thick, reinforced elastoplastomeric polymer – bitumen bridge deck waterproofing membrane characterised by a high resistance to puncture and is therefore particularly suitable for single layer waterproofing systems where high mechanical resistance is required such as bridge decks, road ways and viaducts.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007018-UNIT	PROOFEX TORCHSEAL A900	10 X 1M ROLL	16	 9300611616210





Fosroc Proofex Torchseal Pressure SL Flash

Proofex Torchseal Pressure SL Flash aluminium strip for sealing and flashing the edge of Torchseal sheet Membranes.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC007019-UNIT	PROOFEX TORCHSEAL PRESSURE SL FLASH	3M	350	 9300611616487



Fosroc Primer 24

Primer 24 is used prior to the application of Proofex and Torchseal self adhesive membranes to porous substrates such as concrete.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC020500-4L	PRIMER 24 4L	4L	108	 9300611612540
 FC020500-20L	PRIMER 24 20L	20L	32	 9300611612557


Fosroc Nitoprime 115

Nitoprime 115 is a water based primer specifically designed with adhesion enhancing properties for use onto metallic, smooth, dense, and non-porous surfaces.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC000600-4L	NITOPRIME 115 4L	4L	120	 9300611580603

Fosroc Nitoprime 120



Nitoprime 120 is a single component fast drying primer that provides excellent high bonding and penetrating properties into concrete and masonry surfaces.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC000601-15L	NITOPRIME 120 15L	15L	32	 9300611580610

Fosroc Nitoproof 210

Nitoproof 210 is a high performance single component water based bituminous rubberised liquid applied waterproofing membrane, which contains root inhibiting additives.



Typical applications: Waterproofing applications such as retaining walls, planter boxes, building foundation walls & below ground tanking structures.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC000605-15L	NITOPROOF 210 15L	15L	48	 9300611580658

Fosroc Nitoproof 310

Nitoproof 310 is a fibre enhanced single component water based latex liquid applied membrane, designed for waterproofing applications where the membrane is to be covered over with tiles, screeds or concrete beds.





Typical applications: Waterproofing balconies and wet areas which are being tiled over.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC000602-15L	NITOPROOF 310 15L	15L	32	 9300611580627

Fosroc Nitoproof 410

Nitoproof 410 is a water based, fast drying, flexible two component, polymer modified, cementitious waterproofing membrane designed for under toppings, tiles and other protected environments. It may also be used for foot trafficable exposed roof top membranes and foot trafficable exposed balcony decks when overcoated with Nitoproof Top Coat UV.





Typical applications: Waterproofing podiums, terraces, balconies and deck areas which will be protected.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
NITOPROOF 410 20L PACK				
 FC000603-12.5L	NITOPROOF 410 PART A 12.5L	19L PACK	32	 9300611580634
 FC000604-12.5KG	NITOPROOF 410 PART B 12.5KG		64	 9300611580641

Fosroc Nitoproof 510

Nitoproof 510 is a grey, two-component, epoxy coating. When applied at 300 microns dry film thickness it will provide a moisture barrier coating to restrict passage of dampness through concrete and masonry substrates.



Typical applications: Interior faces of walls, floors, basements, tunnels, cellars, retaining walls, lift wells and underground car parks.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
NITOPROOF 510 20L PACK				
 FC000625-10L	NITOPROOF 510 PART A 10L	20L PACK	32	 9300611627612
 FC000626-10L	NITOPROOF 510 PART B 10L		32	 9300611627629

Fosroc Nitoproof 610

Nitoproof 610 is a single component polyurethane liquid which cures by reaction with atmospheric moisture to give a tough elastomeric waterproof membrane. It is supplied as a thixotropic liquid which is easily applied at the recommended thickness to both vertical and horizontal surfaces.



Typical applications: Foundations, Basements, Tunnels, Ground floors, Suspended floors, Roof terraces, Balconies, Patios and Bridges.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC000627-15L	NITOPROOF 610 15L	15L	36	 9300611629593

Fosroc Nitoproof 750

Nitoproof 750 is a single-component polyurethane liquid which cures by reaction with atmospheric moisture to give a tough elastomeric waterproof membrane. Easy application at the recommended thickness to both vertical and horizontal surfaces.



Typical applications: Waterproofing foundations, basements, roofs, and tunnels.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC000609-15L	NITOPROOF 750 15L	15L	32	 9300611580696

Fosroc Nitoproof 810

Nitoproof 810 is a water based polyurethane single component membrane designed for a wide range of waterproofing applications in the built environment. Nitoproof 810 is an alternative to solvent based and moisture curing polyurethane membranes.



Typical applications: Suitable for internal and external wet areas, enabling the direct fix of ceramic tiles, screeds, and renders over the dried membrane using Nitotile Flex polymer modified cement based tile adhesive.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC000608-15L	NITOPROOF 810 15L	15L	32	 9300611580689

Fosroc Nitoproof Top Coat UV



Nitoproof Top Coat UV is an acrylic hybrid, hard wearing top coat designed for external applications on horizontal surfaces. Nitoproof Top Coat UV exhibits outstanding adhesion properties and excellent UV weather resistance.

Typical applications: Suitable for use as a trafficable top coat over Nitoproof 410 and the Nitoproof 810 membranes for roofs and deck areas.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC000606-15L	NITOPROOF TOP COAT UV (GREY) 15L	15L	32	 9300611580665



Fosroc Nitoproof Top Coat EW

Nitoproof Top Coat EW is a solvent free hybrid sealer designed for use over Nitoproof Top Coat UV to improve stain resistance and scuff marks associated with pedestrian foot traffic. Nitoproof Top Coat EW exhibits excellent UV resistance and durability.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC000607-15L	NITOPROOF TOP COAT EW 15L MTO	15L	32	55	14-21	 9300611580672









Fosroc Polyurea WHE110

Polyurea WHE110 is a spray-applied, 100% solids, flexible, two-component, rapid curing hybrid Polyurea-polyurethane system. Designed as a waterproofing and protective coating.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
POLYUREA WHE110 42.5KG PACK				
 FC007090-22.5KG	POLYUREA WHE110 PART A 22.5 KG	42.5KG PACK	50	 9300611580252
 FC007091-20KG	POLYUREA WHE110 PART B 20 KG		50	 9300611580269
POLYUREA WHE110 425KG PACK				
 FC007090-225KG	POLYUREA WHE110 PART A 225KG	425KG PACK	4	 9300611575746
 FC007091-200KG	POLYUREA WHE110 PART B 200KG		4	 9300611575739



Fosroc Polyurea WPE110

Polyurea WPE110 is a spray-applied, 100% solids, flexible, two-component, rapid curing pure Polyurea system. Designed as a waterproofing and protective coating. Suitable for use in potable water applications, complies with AS/NZS 4020.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
POLYUREA WPE110 42.5KG PACK				
 FC007088-22.5KG	POLYUREA WPE110 PART A 22.5KG	42.5KG PACK	48	 9300611580078
 FC007089-20KG	POLYUREA WPE110 PART B 20KG		50	 9300611580085
POLYUREA WPE110 425KG PACK				
 FC007088-225KG	POLYUREA WPE110 PART A 225KG	425KG PACK	4	 9300611575746
 FC007089-200KG	POLYUREA WPE110 PART B 200KG		4	 9300611575753

Fosroc Nitoprime 320 PU
















Nitoprime 320PU is used to prime concrete before application of Fosroc Polyurea WHE110 and WPE110 membranes

PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
 FC007092-20KG	NITOPRIME 320 PU 20KG	20KG	 9300611580665

Fosroc Polyurea SCS

Polyurea SCS is a 100% solids, flexible, rapid curing hybrid Polyurea, designed as an excellent seam seal for the Fosroc Proofex Engage waterproofing system. It consists of two components which are pumped through a static mixer gun to facilitate uniform mixing.

Typical applications: Sealing seams in Proofex Engage applications.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
 FC007082-600ML	POLYUREA SCS 600ML DUAL CARTRIDGE	600ML	10	 9300611590688
 FC007087-UNIT	POLYUREA SCS MANUAL GUN			
 FC007094-UNIT	POLYUREA SCS STATIC MIXER			 9300611604354
 FC007082-1.5L	POLYUREA SCS TWIN CARTRIDGE 1.5L MTO	1.5L	100	 9300611674982
 FC007086-UNIT	POLYUREA SCS 1.5L STATIC MIXER MTO			 9300611676740
 FC007098-UNIT	POLYUREA SCS 1.5L PNEUMATIC GUN MTO			 9300611675996
POLYUREA SCS 42.5KG PACK				
 FC007083-22.8KG	FOSROC POLYUREA SCS PART A 22.8KG	42.5KG PACK		 9300611590626
 FC007084-21.6KG	FOSROC POLYUREA SCS PART B 21.6KG			 9300611590633



WATERPROOFING

CEMENTITIOUS WATERPROOFING

Vandex BB75-Z

Vandex BB75-Z is a surface applied, cement based render, waterproofing barrier for positive and negative water pressure applications. It can be used on most masonry surfaces, including sandstone, provided surfaces are adequately prepared. Ideal for applications solving when the pressure face is not easily accessible.



Typical applications: Waterproofing the inside face of swimming pools, sewerage processing tanks, concrete block walls and many other masonry surfaces.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
 FC051005-25KG	VANDEX BB75-Z 25KG	25KG	40	 7612940000625

Vandex Elasticizer PK75

Vandex Elasticiser PK75 is mixed with Vandex BB75-Z to form Vandex BB75E-Z a crack accommodating cement based render, waterproofing barrier for waterproofing of concrete and masonry structures, either positive or negative side, where live cracks up to 0.5mm are present.



Typical applications: Ideal for solving the problem of water seepage through concrete and masonry where live cracks are present in both new and old structures.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC051003-10KG	VANDEX ELASTICIZER PK75 10KG	10KG	60	 7612940000069

Vandex Cemelast

Vandex Cemelast is mixed with Vandex BB75-Z to form a flexible, surface applied, cement based render for waterproofing of concrete and masonry structures, either positive or negative side, where live cracks up to 0.3mm are present.



Typical applications: Ideal for solving the problem of water seepage through concrete and masonry where live cracks are present in both new and old structures.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC051009-9KG	VANDEX CEMELAST 9KG	9KG	50	 7612940000441

Vandex Concrete Grey

Vandex Concrete Grey is a slurry applied, concrete capillary penetrating, crystal growth, waterproofing system for positive and negative water pressure applications.





Typical applications: waterproofing lift pits, basement walls, concrete floor slabs, balconies, water storage tanks, swimming pools, sewerage treatment plants, canals and bridges.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC051011-25KG	VANDEX CONCRETE GREY 25KG	25KG	40	 7612940000052

Vandex Plug

Vandex Plug is a rapid setting, plugging mortar used to stop water seepage through porous concrete and fast flowing water through cracks and construction joints in concrete and masonry.



Typical applications: Plugging leaks in in-situ and precast concrete segments in tunnels, water storage tanks, sewerage mains and processing tanks, basements, below ground car parks, access chambers, building foundations.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC000557-5KG	VANDEX PLUG 5KG	5KG	100	 7612940000212
	FC051006-15KG	VANDEX PLUG 15KG	15KG	36	 7612940000168

Vandex Uni-Mortar 1-Z

Vandex Uni-Mortar 1-Z is a cement based reprofiling and waterproofing repair mortar - (6 mm to 12 mm thickness) primarily used for the reprofiling of new and old concrete and masonry surfaces prior to the application of Vandex membranes.



Typical applications: Reprofiling concrete before application of Vandex membranes.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC051008-25KG	VANDEX UNI-MORTAR 1-Z 25KG	25KG	40	 7612940000298

Vandex Construction Joint Tape

Vandex Construction Joint Tape is a synthetic rubber strip, approximately 0.7 mm thick which bridges and seals construction joints and cracks in concrete structures. Vandex Construction Tape is installed using Vandex BB75E-Z or Cemelast.

Typical applications: Bridging construction joints and cracks in concrete structures.












	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER PALLET	BARCODE
	FC051010-UNIT	VANDEX CONSTRUCTION JOINT TAPE	180MM X 30M ROLL	64	 9330221148283

WATERPROOFING ACCESSORIES – LIQUID APPLIED

Fosroc Nitoband

Nitoband is an alternative to traditional bond breaking methods for sealing critical movement zones. The Nitoband System is an approved bond breaker and includes pre-fabricated corners and pipe penetration detailing squares for superior sealing in the most critical of areas.



Typical applications: Bridging cracks and joints when using Nitoproof membranes.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC000612-UNIT	NITOBAND TAPE 120MM X 10M	120MM X 10M ROLL	 9300611580726
	FC000616-UNIT	NITOBAND PIPE DETAILING SQUARE SMALL	<50MM	 9300611580771
	FC000617-UNIT	NITOBAND PIPE DETAILING SQUARE MEDIUM	<110MM	 9300611580788
	FC000619-UNIT	NITOBAND PIPE DETAILING SQUARE LARGE	<150MM	 9300611631183
	FC000614-UNIT	NITOBAND CORNER PIECE INTERNAL 90°	135MM X 135MM	 9300611580740
	FC000615-UNIT	NITOBAND CORNER PIECE EXTERNAL 270°	135MM X 135MM	 9300611598899
	FC000613-UNIT	NITOBAND CORNER PIECE ADJUSTABLE INTERNAL	135MM X 135MM	 9300611580733

Fosroc Nitoband SA

Nitoband SA is a self-adhesive alternative to traditional bond breaking methods for sealing critical movement zones. The Nitoband system is an approved bond breaker for superior sealing in the most critical of areas.

Typical applications: Bridging cracks and joints when using Nitoproof membranes.








	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC000669-UNIT	NITOBAND SA80 TAPE, SELF ADHESIVE 80MM X 10M	80MM X 10M ROLL	 9300611686992

Fosroc Supercast PVC Waterstops











Supercast PVC waterstops are designed to provide an integral sealing system for movement and construction joints in cast or concrete. The range consists of centrally placed profiles; Supercast Hydrofoil and Rearguard externally placed profiles. Supercast PVC waterstops are available as straight lengths (rolls) and factory produced intersections.

Typical applications: Expansion and Construction joints in water retaining and water excluding structures such as tanks and basements

Supercast Rearguard R

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC020360-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 250MM X 12M ROLL	250MM X 12M ROLL	 9330221123150
	FC020361-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 250MM 90° MOF	250MM 90° MOF	 9330221123143
	FC020362-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 250MM 3WAY	250MM 3 WAY	 9330221123136
	FC020363-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 250MM 4WAY	250MM 4 WAY	 9330221123129
	FC020372-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 250MM 90° MOE	250MM 90° MOE	 9330221123082
	FC070357-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD JIG 250MM	-	 9330221122825
	FC020340-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 200MM X 12M ROLL	200MM X 12M ROLL	 9330221123259
	FC020341-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 200MM 90° MOF MTO	200MM 90° MOF	 9330221123242
	FC020342-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 200MM 3WAY MTO	200MM 3 WAY	 9330221123235
	FC020343-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 200MM 4WAY MTO	200MM 4 WAY	 9330221123228
	FC020371-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 200MM 90° MOE MTO	200MM 90° MOE	 9330221123099
	FC070356-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD JIG 200MM	-	 9330221122832
	FC020330-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 150MM X 12M ROLL	150MM X 12M ROLL	 9330221123303
	FC020331-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 150 90° MOF MTO	150MM 90° MOF	 9330221123297
	FC020332-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 150MM 3WY MTO	150MM 3 WAY	 9330221123280
	FC020333-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 150MM 4WY MTO	150MM 4 WAY	 9330221123273
	FC020370-UNIT	SUPERCAST PVC WATERSTOPS REARGUARD R 150MM 90° MOE MTO	150MM 90° MOE	 9330221123105






Supercast Rearguard S

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC020350-UNIT	SUPERCAS T PVC WATERSTOPS REARGUARD S 250MM X 12M ROLL	250MM X 12M ROLL	 9330221123204
	FC020351-UNIT	SUPERCAS T PVC WATERSTOPS REARGUARD S 250MM 90° MOF	250MM 90° MOF	 9330221123198
	FC020352-UNIT	SUPERCAS T PVC WATERSTOPS REARGUARD S 250MM 3WAY	250MM 3 WAY	 9330221123181
	FC020353-UNIT	SUPERCAS T PVC WATERSTOPS REARGUARD S 250MM 4WAY	250MM 4 WAY	 9330221123174
	FC020376-UNIT	SUPERCAS T PVC WATERSTOPS REARGUARD S 250MM 90° MOE	250MM 90° MOE	 9330221123044

Supercast Hydrofoil

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC020303-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 250MM X 12M ROLL	250MM X 12M ROLL	 9330221123464
	FC020320-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 250MM MOF	250MM MOF	 9330221123358
	FC020321-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 250MM 3WAY	250MM 3 WAY	 9330221123341
	FC020322-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 250MM 4WAY	250MM 4 WAY	 9330221123334
	FC020324-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 250MM 90°MOE	250MM 90° MOE	 9330221123310
	FC070352-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL JIGS 250MM	-	 9330221122856
	FC020302-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 200MM X 15M ROLL	200MM X 15M ROLL	 9330221123471
	FC020313-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 200MM MOF MTO	200MM MOF	 9330221123402
	FC020314-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 200MM 3WAY MTO	200MM 3 WAY	 9330221123396
	FC020315-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 200MM 4WAY MTO	200MM 4 WAY	 9330221123389
	FC020317-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 200MM 90° MOE MTO	200MM 90° MOE	 9330221123365
	FC070351-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL JIGS 200MM	-	 9330221122863
	FC020301-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 150MM X 15M ROLL	150MM X 15M ROLL	 9330221123488
	FC020306-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 150MM MOF MTO	150MM MOF	 9330221123457
	FC020307-UNIT	SUPERCAS T PVC WATERSTOPS HYDROFOIL 150MM 3WAY MTO	150MM 3 WAY	 9330221123440

Supercast Hydrofoil (Continued)

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC020308-UNIT	SUPERCAS ^T PVC WATERSTOPS HYDROFOIL 150MM 4WAY MTO	150MM 4 WAY	 9330221123433
	FC020310-UNIT	SUPERCAS ^T PVC WATERSTOPS HYDROFOIL 150MM 90°MOE MTO	150MM 90° MOE	 9330221123419
	FC070350-UNIT	SUPERCAS ^T PVC WATERSTOPS HYDROFOIL JIGS 150MM	-	 9330221122870





Supercast Welding Iron

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC101135-UNIT	PAR WELDING IRON 414 JP	-	 9330221129756

Conseal CS231

Conseal CS231 is a low expansion sealing gasket for construction joints in pre-cast and in-situ concrete. Conseal CS231 is compressible within the joint and will provide an immediate and effective seal followed by controlled expansion.







Typical applications: Sealing non-moving joints in pre-cast structures or between in-situ pours and existing concrete applications and as sealing strips for manholes, pipe penetrations and box culverts and wastewater.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC702210-UNIT	CONSEAL CS231 25MM X 25MM X 12MM X 5M ROLL	25MM X 25MM X 12MM X 5M ROLL	 19330221155660
	FC702215-UNIT	CONSEAL CS231 19MM X 12MM X 12MM X 7.5M ROLL	19MM X 12MM X 12MM 7.5M ROLL	 19330221155677

Earth Shield TPV-TPER

Earth Shield TPV-TPER is a range of thermoplastic elastomeric rubber waterstops for joints in critical chemical, industrial and environmental applications.

Typical applications: Primary and secondary containment, refineries, mining facilities, fueling depots, chemical plants and acid storage.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC000291-UNIT	EARTH SHIELD TPV-TPER JP636 CENTREBULB 150MM	150MM X 15.2M ROLL	 9330221121552
	FC000295-UNIT	EARTH SHIELD TPV-TPER JP936 CENTREBULB 230MM	230MM X 15.2M ROLL	 9330221121514
	FC000286-UNIT	EARTH SHIELD TPV-TPER JP211 REAR GUARD 230MM	230MM X 15.2M ROLL	 9330221121606

C.I. TAKIRON HYDROTITE

Hydrotite is a hydrophilic waterstop manufactured by C.I. Takiron Corp. which expands in a controlled manner in the presence of moisture to create a pressure seal within construction joints in concrete structures.

Typical applications: Construction joints in water retaining and water excluding structures.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC000560-UNIT	HYDROTITE DSS0220 ADH / 25M ROLL	2MM X 20MM X 25M ROLL	 9330221121187
	FC000550-UNIT	HYDROTITE CJ0725-3K ADH / 10M ROLL	7MM X 25MM X 10M ROLL	 9330221120920
	FC000555-UNIT	HYDROTITE CJ1020-2K ADH / 10M ROLL	10MM X 20MM X 10M ROLL	 19330221120903
	FC000580-UNIT	HYDROTITE RSS1610D / 10M ROLL	16MM DIAMETER X 10M ROLL	 19330221120842
	FC000455-UNIT	HYDROTITE RSS2014D / 10M ROLL	20MM DIAMETER X 10M ROLL	 19330221128855
	FC000595-UNIT	HYDROTITE RSS2205D / 10M ROLL	22MM DIAMETER X 10M ROLL	 19330221120811
	FC000545-UNIT	HYDROTITE RSS2519D / 5M ROLL	25MM DIAMETER X 10M ROLL	 19330221120934

C.I. TAKIRON LEAKMASTER

Leakmaster is a gun applied, water-swellaable, waterstop paste manufactured by C.I. Takiron Corp. for bonding Hydrotite profiles to rough concrete surfaces. It can also be used as a stand-alone water sealing non-movement joints of cast in-situ concrete.





Typical applications: Pipe penetrations, rough surfaces such as shotcrete.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC000785-UNIT	LEAKMASTER 320ML	320ML	24	 9330221120241

Superswell 47B

Superswell 47B is a high expansion butyl bentonite based hydrophilic waterstop for sealing joints between concrete.


Typical applications: Non-movement joints eg. horizontal construction joints between floor slabs and cast in situ walls such as lift overrun pits and retaining walls.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC002205-UNIT	SUPERSWELL 47B 19MM X 12MM X 12MM X 7.5M ROLL	19MM X 12MM X 12MM X 7.5M ROLL	8	 19330221155653
	FC002200-UNIT	SUPERSWELL 47B 25MM X 20MM X 5M	25MM X 20MM X 5M ROLL	6	 19330221155646

JOINT FILLERS & SEALANTS

CELLFLEX™ ▪ **CONSEAL** ▪ **EXPANDAFOAM®**
FLAMEX® ▪ **HYDROCELL™** ▪ **HYDROCOR™**
CORKJOINT® ▪ **NITOSEAL®** ▪ **THIOFLEX®**

Please always refer to the product TDS before making your final selection or speak to your Fosroc representative.

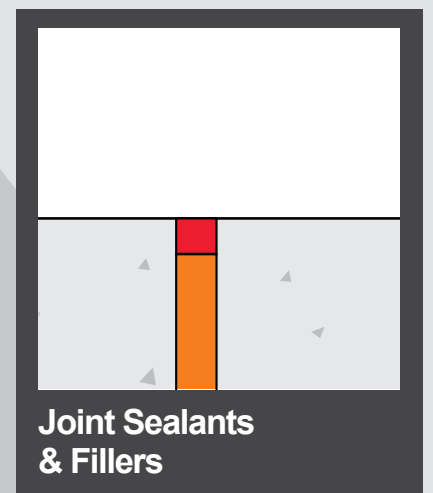




































GENERAL CONSTRUCTION SEALANTS

Fosroc Nitoseal MS250

Nitoseal MS250 silyl modified polymer, polyurethane hybrid sealant using Duraflex® technology to provide the weathering and adhesion performance of a silicone sealant, together with the toughness of a polyurethane sealant.















Typical applications: non-trafficable sealing moving or static joints in building facades and general construction where high UV resistance is required.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC920175-600ML	NITOSEAL MS250 BEIGE 600ML	600ML		12	960	-	-	 9300611657329
 FC920170-600ML	NITOSEAL MS250 BLACK 600ML	600ML		12	960	-	-	 9300611592743
 FC920176-600ML	NITOSEAL MS250 BRICK RED 600ML	600ML		12	960	-	-	 9300611657336
 FC920171-600ML	NITOSEAL MS250 CONCRETE GREY 600ML	600ML		12	960	-	-	 9300611592750
 FC920178-600ML	NITOSEAL MS250 DARK EARTH 600ML	600ML		12	960	-	-	 9300611657350
 FC920174-600ML	NITOSEAL MS250 DARK GREY 600ML	600ML		12	960	-	-	 9300611657312
 FC920172-600ML	NITOSEAL MS250 OFF WHITE 600ML	600ML		12	960	-	-	 9300611592767
 FC920177-600ML	NITOSEAL MS250 REDWOOD 600ML	600ML		12	960	-	-	 9300611657343
 FC920179-600ML	NITOSEAL MS250 SANDSTONE 600ML	600ML		12	960	-	-	 9300611657367
 FC920173-600ML	NITOSEAL MS250 WHITE 600ML	600ML		12	960	-	-	 9300611657305
 FC920169-600ML	NITOSEAL MS250 PALE BROWN 600ML	600ML		12	960	-	-	 9300611657374
 FC930223-600ML	NITOSEAL MS250 SPECIAL COLOUR 600ML MTO	600ML	SPECIAL COLOUR MTO	12	960	400	14-21	 9300611598271

Fosroc Nitoseal MS400

Nitoseal MS400 is a trafficable silyl modified polymer, polyurethane hybrid sealant using Duraflex technology to provide the weathering and adhesion performance of a silicone sealant, together with the toughness of a polyurethane sealant.


Typical applications: Sealing moving or static joints in applications where high strength and abrasion resistance is required.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	MOQ	LEAD TIME (DAYS)	BARCODE
 FC920181-600ML	NITOSEAL MS400 CONCRETE GREY 600ML	600ML		12	960	-	-	 9300611592859
 FC920180-600ML	NITOSEAL MS400 BLACK 600ML	600ML		12	960	-	-	 9300611592774
 FC930203-600ML	NITOSEAL MS400 WHITE 600ML	600ML		12	960	-	-	 9300611678331
 FC930202-600ML	NITOSEAL MS400 SPECIAL COLOUR 600ML MTO	600ML	SPECIAL COLOUR MTO	12	960	400	14-21	 9300611598288
 FC920181-200L	NITOSEAL MS400 CONCRETE GREY 200L MTO	200L		-	4	4	14-21	 9300611592842

Fosroc Nitoseal PU250

Nitoseal PU250 is a high performance elastomeric polyurethane joint sealant which forms a waterproof and durable seal making it ideal for vertical exterior applications such as sealing joints in concrete panels, fibrous cement products, external cladding panels, blockwork and brickwork.







Typical applications: Sealing moving or static joints in building facades, general construction, windows and door frames.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920112-600ML	NITOSEAL PU250 CONCRETE GREY 600ML	600ML		12	1440	 9300611589927

Fosroc Nitoseal PU400







Nitoseal PU400 is a medium modulus, elastomeric polyurethane joint sealant/adhesive which forms a waterproof and durable seal. It is ideal for exterior applications such as sealing joints and bonding between most construction materials, where a high bond strength and abrasion resistance is required. Suitable for water immersed applications and trafficable surfaces.

Typical applications: Sealing moving or static joints in applications where high strength and abrasion resistance is required.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920121-600ML	NITOSEAL PU400 CONCRETE GREY 600ML	600ML		12	1440	 9300611589965
 FC920122-200L	NITOSEAL PU400 CONCRETE GREY 200L MTO	200L		-	4	 9300611589972

Fosroc Nitoseal SC100

Nitoseal SC100 is a one part, gun applied, neutral cure silicone sealant which cures rapidly to form a durable, weathertight seal. It remains permanently flexible and weatherproof under a wide range of climatic conditions


PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920160-600ML	FOSROC NITOSEAL SC100 BLACK	600ML		12	960	 9300611592729
 FC920161-600ML	FOSROC NITOSEAL SC100 CONCRETE GREY	600ML		12	960	 9300611592736

FIRE RATED SEALANTS

Fosroc Flamex One

Flamex One is a fire rated, one-component, acrylic joint sealant for sealing low movement interior joints requiring a fire rating of up to 4 hours.

Typical applications: Sealing joints in partition walls and other internal joints in concrete walls.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920025-600ML	FLAMEX ONE CONCRETE GREY 600ML	600ML		12	960	 9330221124812

Fosroc Flamex XT

Flamex XT is a fire and acoustic rated, UV resistant, polyurethane hybrid/silyl modified polymer sealant for sealing exterior and interior movement joints where a fire rating of up to 4 hours is required.

Typical applications: Sealing joints in internal and external concrete walls requiring fire rating and acoustic rating.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920045-600ML	FLAMEX XT CONCRETE GREY 600ML	600ML		12	960	 9300611586223

FOSROC SEALANT GUN


Fosroc Sealant Gun is designed to pump high volumes of sealant packed in sausages up to 600mL. Designed for all Fosroc Nitoseal and Flamex Sausages.



Designed For 600ml Sausage, 300-375ml Cartridge

105mm Nozzle Included








High Thrust Ratio

PRODUCT CODE	DESCRIPTION	QTY PER CARTON	BARCODE
FC920210-UNIT	FOSROC SEALANT GUN	6	 9300611678041

SPECIALIST SEALANTS

Fosroc Nitoseal PY350



Nitoseal PY350 is a two-component (twin cartridge) hybrid polyurea, elastomeric rapid cure joint sealant for internal and external applications.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	QTY PER PALLET	LEAD TIME (DAYS)	BARCODE
 FC920125-600ML	FOSROC NITOSEAL PY350	600ML	10	540	-	 9300611653345
FC920126-UNIT	PY350 STATIC MIXER	-	250	N/A	-	 9300611653338
PRODUCT CODE	DESCRIPTION	SIZE	MOQ	QTY PER PALLET	LEAD TIME (DAYS)	BARCODE
NITOSEAL PY350 40KG PACK						
 FC920123-20KG	FOSROC NITOSEAL PY350 PART A 20KG MTO	20KG	20	32	14-21	 9300611675798
 FC920124-20KG	FOSROC NITOSEAL PY350 PART B 20KG MTO	20KG	20	32	14-21	 9300611675804

Fosroc Nitoseal MB175

Nitoseal MB175 is a rubberised bitumen-mastic joint sealant compatible with bitumen based materials.

Typical applications: Sealing joints in retaining walls, sealing terminations and detailing of bitumen based waterproofing membranes.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC900222-600ML	NITOSEAL MB175 600ML	600ML	10	800	 9330221125161

Fosroc Nitoseal SC140










Nitoseal SC140 is a fast curing, tough, pick and abrasion resistant, one-component silicone sealant / adhesive for civil and industrial applications.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920150-600ML	FOSROC NITOSEAL SC140 CONCRETE GREY	600ML		12	960	 9300611592712

Fosroc Nitoseal SC600

Nitoseal SC600 is a one part, gun applied joint sealant designed for sealing joints exposed to aggressive chemical environments. Nitoseal SC600 is resistant to attack from most of the aggressive chemicals used in the food, mining and chemical processing industries. Complies to AS4020:2018.



Typical applications: Sealing joints in chemical acidic and alkali environments as well as biological environments such as water and wastewater.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920100-600ML	NITOSEAL SC600 CONCRETE GREY 600ML	600ML		12	960	 9300611589866
 FC920101-600ML	NITOSEAL SC600 POOL BLUE 600ML	600ML		12	960	 9300611589873
 FC920102-600ML	NITOSEAL SC600 WHITE 600ML	600ML		12	960	 9300611589880

Fosroc Nitoseal SC800

Nitoseal SC800 is a low modulus, high joint movement accommodation, one component silicone rubber joint sealant with Roadseal® technology.




Typical applications: Sealing high movement joints in concrete roads and other pavements.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920130-600ML	NITOSEAL SC800 CONCRETE GREY 600ML	600ML		12	960	 9300611592651

Fosroc Nitoseal SC820

Nitoseal SC820 is a low modulus, self-smoothing, one component, silicone joint sealant with Roadseal® technology. Used for sealing sawn joints abutment joints between concrete and asphalt roads and pavements; slot sealing of cable installations in asphalt and concrete pavements.









Typical applications: Sealing joints between concrete and asphalt in roads and other pavements.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QTY PER CARTON	QTY PER PALLET	BARCODE
 FC920140-600ML	NITOSEAL SC820 CHARCOAL GREY 600ML	600ML		12	960	 9300611592682

Fosroc Thioflex 600 Pouring Grade

Thioflex 600 Pouring Grade is a fuel resistant, two-component, pouring grade, polysulphide joint sealant for horizontal movement joints for sealing horizontal movement joints in concrete.




Typical applications: Sealing horizontal joints in civil engineering structures including roads, bridges and airfields.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
THIOFLEX 600 POURING GRADE 4L PACK				
 FC920400-3.7L	THIOFLEX 600 POURING GRADE BASE 3.7L	4L PACK	4	 9300611621115
 FC920401-300ML	THIOFLEX 600 POURING GRADE GREY CURING COMPOUND 0.3L		24	 9300611621122
THIOFLEX 600 POURING GRADE 16L PACK				
 FC920416-14.8L	THIOFLEX 600 POURING GRADE BASE 14.8L	16L PACK	-	 9330221124782
 FC920401-300ML	THIOFLEX 600 POURING GRADE CURING COMPOUND 300ML X 4 UNITS		-	 9330221124775

Fosroc Thioflex 600 Gun Grade

Thioflex 600 Gun Grade is a fuel resistant, high joint movement accommodation, two-component, polysulphide, gun applied joint sealant for sealing movement joints in concrete structures.

Typical applications: Sealing joints in civil engineering structures, including roads, bridges and airfields.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE	
FOSROC THIOFLEX 600 GUN GRADE 6L PACK					
	FC920422-5.5L	THIOFLEX 600 GUN GRADE GREY BASE 5.5L	6L PACK	-	 9300611621139
	FC920423-500ML	THIOFLEX 600 GUN GRADE GREY CURING COMPOUND 0.5L			10

Fosroc Expoband F Tape

Expoband F is a Flexible Polyolefine membrane available in 1mm and 2mm thicknesses and widths including 100mm, 150mm, 200mm, 250mm and 300mm. Special widths up to 500mm can be manufactured to order (please contact us for further information if this is of interest). Expoband F is supplied in rolls 20m in length.



PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE	
	FC020446-UNIT	EXPOBAND F1501	1MM X 150MM X 20M ROLL	3	 9300611627803
	FC020448-UNIT	EXPOBAND F2001	1MM X 200MM X 20M ROLL	5	 9300611627827
	FC020445-UNIT	EXPOBAND F1002	2MM X 100MM X 20M ROLL	2	 9300611627797
	FC020447-UNIT	EXPOBAND F1502	2MM X 150MM X 20M ROLL	5	 9300611627810
	FC020449-UNIT	EXPOBAND F2002	2MM X 200MM X 20M ROLL	5	 9300611627834
	FC020450-UNIT	EXPOBAND F2502	2MM X 250MM X 20M ROLL	5	 9300611627841
	FC020451-UNIT	EXPOBAND F3002	2MM X 300MM X 20M ROLL	5	 9300611627858
	FC020452-UNIT	EXPOBAND F4002	2MM X 400MM X 20M ROLL	5	 9300611627865
	FC020453-UNIT	EXPOBAND F5002	2MM X 500MM X 20M ROLL	5	 9300611627872

PRIMERS

Refer to the relevant sealant TDS for guidance in choosing the correct primer.



Fosroc Primer 4

Primer 4 is a solvent based primer used with Thioflex 600 Pouring Grade and Gun Grade sealants on non-porous surfaces such as metal joint surfaces.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC965207-250ML	PRIMER 4 250ML	250ML	20	 9330221123976



Fosroc Primer 7

Primer 7 is a solvent based primer used with Thioflex 600 Pouring Grade and Gun Grade sealants, on porous surfaces that will not be subject to permanent immersion or long-term dampness.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC965209-1L	PRIMER 7 1L	1L	12	 9330221123969





Fosroc Primer 10

Primer 10 is a solvent based primer used with silicone and silyl modified polymer/polyurethane hybrid sealants, on porous surfaces that will not be subject to permanent immersion or long-term dampness.

	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC965214-250ML	PRIMER 10 250ML	250ML	20	 9330221123938

Fosroc Primer 13



Primer 13 is a two-component epoxy primer suitable for immersed conditions including potable water applications, complies with AS/ NZS 4020.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
PRIMER 13 250ML PACK				
	FC965229-125ML PRIMER 13 BASE 125ML	250ML PACK	25	 9300611589255
	FC965230-125ML PRIMER 13 HARDENER 125ML		25	 9300611589262
PRIMER 13 1L PACK				
	FC965229-500ML PRIMER 13 BASE 500ML	1L PACK	10	 9300611590299
	FC965230-500ML PRIMER 13 HARDENER 500ML		10	 9300611590305

JOINT FILLERS
& SEALANTS

Fosroc Primer 21




Primer 21 is a solvent based primer used with polyurethane sealants, on porous surfaces that will not be subject to permanent immersion or long-term dampness.

PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC965228-250ML PRIMER 21 250ML	250ML	20	 9330221123884

Fosroc Proofex S

Proofex S is an externally applied woven polypropylene tape coated with a modified bituminous self-adhesive compound. Proofex S is normally used in conjunction with internally placed Conseal CS231 sealing strip.

Typical applications: Sealing joints in pre-cast elements such as box culverts.





















	PRODUCT CODE	DESCRIPTION	SIZE	QTY PER CARTON	BARCODE
	FC700370-UNIT	PROOFEX S100 20M ROLL	100MM X 20M ROLL	5	 9300611612397
	FC700371-UNIT	PROOFEX S150 20M ROLL	150MM X 20M ROLL	3	 9300611612403
	FC700372-UNIT	PROOFEX S200 20M ROLL	200MM X 20M ROLL	2	 9300611612519
	FC700373-UNIT	PROOFEX S250 20M ROLL	250MM X 20M ROLL	2	 9300611612526
	FC700374-UNIT	PROOFEX S300 20M ROLL	300MM X 20M ROLL	1	 9300611612533
	FC700375-UNIT	PROOFEX S VARIABLE WIDTH ROLL 20M MTO	20M ROLL VARIABLE WIDTH	1	 9300611618665

JOINT FILLERS AND BACKING RODS

Fosroc Expandafoam

Expandafoam is a closed-cell polyethylene joint filler for use as an expansion joint filler in brick and blockwork, isolation joints and as back-up strips for elastomeric sealants placed in narrow joints in concrete floors subject to foot traffic and light wheel loads.

Typical applications: Joint filler in concrete and masonry wall and pavement joints.



	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700605-UNIT	EXPANDAFOAM 10MM	1.2M X 2.4M SHEET	 9330221120791
	FC700610-UNIT	EXPANDAFOAM 12MM	1.2M X 2.4M SHEET	 9330221120753
	FC700615-UNIT	EXPANDAFOAM 15MM	1.2M X 2.4M SHEET	 9330221120746
	FC700623-UNIT	EXPANDAFOAM 20MM	1.2M X 2.4M SHEET	 9330221120739
	FC700625-UNIT	EXPANDAFOAM 25MM	1.2M X 2.4M SHEET	 9330221120708
	FC700630-UNIT	EXPANDAFOAM 30MM MTO	1.2M X 2.4M SHEET	 9330221120692
	FC700635-UNIT	EXPANDAFOAM 40MM	1.2M X 2.4M SHEET	 9330221120685
	FC700640-UNIT	EXPANDAFOAM 50MM	1.2M X 2.4M SHEET	 9330221120678
	FC700690-UNIT	EXPANDAFOAM 75MM X 10MM	75MM X 10MM X 25M ROLL	 9330221120531
	FC700650-UNIT	EXPANDAFOAM 100MM X 10MM	100MM X 10MM X 25M ROLL	 9330221120661

JOINT FILLERS & SEALANTS

Fosroc Expandafoam Self Adhesive

Expandafoam Self Adhesive is a closed-cell polyethylene joint filler with a self adhesive backing for use as an expansion joint filler in brick and blockwork, isolation joints and as back-up strips for elastomeric sealants placed in narrow joints in concrete floors subject to foot traffic and light wheel loads.

Typical applications: Joint filler in concrete and masonry wall and pavement joints.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700195-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 75MM	10MM X 75MM X 25M ROLL	 9330221121859

















Fosroc Expandafoam (Continued)

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700170-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 100MM	10MM X 100MM X 25M ROLL	 9330221121903
	FC700173-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 125MM	10MM X 125MM X 25M ROLL	 9330221121897
	FC700180-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 150MM	10MM X 150MM X 25M ROLL	 9330221121880
	FC700185-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 200MM	10MM X 200MM X 25M ROLL	 9330221121873
	FC700160-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 250MM	10MM X 250MM X 25M ROLL	 9330221121927
	FC700190-UNIT	EXPANDAFOAM SELF ADHESIVE 10MM X 300MM	10MM X 300MM X 25M ROLL	 9330221121866
	FC700165-UNIT	EXPANDAFOAM SELF ADHESIVE 50MM X 10MM	50MM X 10MM X 25M ROLL	 9330221121910

Fosroc Expandafoam Closed Cell

Expandafoam Closed Cell is a polyethylene foam rod supplied in circular section cords of varying diameters. Expandafoam Closed Cell is used in conjunction with joint sealants in expansion joints.











Typical applications: Primarily used in expansion joints but is also suitable for use in any joint system requiring a readily compressible joint filler.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700973-UNIT	EXPANDAFOAM CLOSED CELL 10MM DIAMETER	10MM X 250M ROLL	 9300611568649
	FC700974-UNIT	EXPANDAFOAM CLOSED CELL 13MM DIAMETER	13MM X 100M ROLL	 9300611568656
	FC700975-UNIT	EXPANDAFOAM CLOSED CELL 15MM DIAMETER	15MM X 100M ROLL	 9300611568663
	FC700976-UNIT	EXPANDAFOAM CLOSED CELL 20MM DIAMETER	20MM X 60M ROLL	 9300611568687
	FC700977-UNIT	EXPANDAFOAM CLOSED CELL 25MM DIAMETER	25MM X 50M ROLL	 9300611568694
	FC700978-UNIT	EXPANDAFOAM CLOSED CELL 30MM DIAMETER	30MM X 50M ROLL	 9300611568700
	FC700979-UNIT	EXPANDAFOAM CLOSED CELL 40MM DIAMETER	40MM X 2M STRIP	 9300611568717
	FC700980-UNIT	EXPANDAFOAM CLOSED CELL 50MM DIAMETER	50MM X 2M STRIP	 9300611568724

Fosroc Expandafoam Open Cell

Expandafoam Open Cell is an open cell polyurethane foam rod supplied in circular section cords of varying diameters. Expandafoam Open Cell is primarily used in expansion joints which are to be subsequently sealed with one component polyurethane and similar sealants.

Typical applications: Used as a backing rod with joints sealants in concrete and masonry joints.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700981-UNIT	EXPANDAFOAM OPEN CELL 16MM DIAMETER	16MM X 150M ROLL	 9300611568731
	FC700982-UNIT	EXPANDAFOAM OPEN CELL 22MM DIAMETER	22MM X 100M ROLL	 9300611568748
	FC700983-UNIT	EXPANDAFOAM OPEN CELL 29MM DIAMETER	29MM X 60M ROLL	 9300611568755
	FC700984-UNIT	EXPANDAFOAM OPEN CELL 38MM DIAMETER	38MM X 30M ROLL	 9300611568762
	FC700985-UNIT	EXPANDAFOAM OPEN CELL 50MM DIAMETER	50MM X 20M ROLL	 9300611568779

Fosroc Hydrocor Corkjoint

Hydrocor Corkjoint is a range of self expanding cork filler used for forming, filling and sealing expansion and static joints.

Typical applications: Filling joints in water retaining structures, water excluding structures, concrete roads, bridges and car parks and other internal or external traffic areas





























i Please note that custom size options are also available, configurable based on the following possible size options for each dimension. Thickness available: 10mm, 12mm, 15mm, 16mm, 20mm, 25mm, or 30mm. Depth must be between 50mm - 635mm. Lengths available: 930mm, 1200mm, 1500mm, 1800mm. Please contact your account representative or customer service for more details.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC7CSPEC-UNIT	HYDROCOR CORKJOINT TYPE 3 MTO	VARIABLE	 9330221154390
	FC75000-UNIT	HYDROCOR CORKJOINT TYPE 3 1500MM X 100MM	1500MM X 100MM X 10MM	 9330221155038
	FC75002-UNIT	HYDROCOR CORKJOINT TYPE 3 1500MM X 125MM X 10MM	1500MM X 125MM X 10MM	 9330221155014
	FC75003-UNIT	HYDROCOR CORKJOINT TYPE 3 1500MM X 150MM X 12MM	1500MM X 150MM X 12MM	 9330221155007
	FC771040-UNIT	HYDROCOR CORKJOINT TYPE 106 12MM MTO VARIABLE	1500MM X 150MM X 12MM	 9330221123778
	FC771045-UNIT	HYDROCOR CORKJOINT TYPE 106 15MM MTO VARIABLE	1500MM X 150MM X 12MM	 9330221123761
	FC771050-UNIT	HYDROCOR CORKJOINT TYPE 106 20MM MTO VARIABLE	1500MM X 150MM X 12MM	 9330221123754

Fosroc Hydrocell

Hydrocell is a semi-rigid, UV resistant, cross-linked, non-absorbent, closed-cell polyethylene sheet material used to support joint sealants in expansion joints.



















Typical applications: Used in conjunction with suitable joint sealants in water retaining structures and in joints subject to wheel loads.

	PRODUCT CODE	DESCRIPTION	SIZE	MOQ	LEAD TIME (DAYS)	BARCODE
	FC701000-UNIT	HYDROCELL 10MM	10MM X 2.4M X 1.2M SHEET	-	-	 9330221130080
	FC701010-UNIT	HYDROCELL 15MM	15MM X 2.4M X 1.2M SHEET	-	-	 9330221130066
	FC701015-UNIT	HYDROCELL 20MM	20MM X 2.4M X 1.2M SHEET	-	-	 9330221130059
	FC700850-UNIT	HYDROCELL 100MM X 10MM MTO	100MM X 10MM X 1.4M STRIP	360	14-21	 9330221127530
	FC700920-UNIT	HYDROCELL 75MM X 10MM MTO	75MM X 10MM X 1.5M STRIP	960	14-21	 9330221127455
	FC720975-UNIT	HYDROCELL 100MM X 10MM	100MM X 10MM X 1.5M STRIP	-	-	 9330221130134
	FC700870-UNIT	HYDROCELL 125MM X 10MM	125MM X 10MM X 1.5M STRIP	-	-	 9330221127516
	FC701045-UNIT	HYDROCELL 50MM X 10MM	50MM X 10MM X 2.4M STRIP	-	-	 9330221129985
	FC701050-UNIT	HYDROCELL 75MM X 10MM	75MM X 10MM X 2.4M STRIP	-	-	 9330221129978
	FC720980-UNIT	HYDROCELL 100MM X 10MM	100MM X 10MM X 2.4M STRIP	-	-	 9330221130127
	FC700995-UNIT	HYDROCELL 150MM X 10MM	150MM X 10MM X 2.4M STRIP	-	-	 9330221130097
	FC701030-UNIT	HYDROCELL 200MM X 10MM	200MM X 10MM X 2.4M STRIP	-	-	 9330221130011
	FC701035-UNIT	HYDROCELL 250MM X 10MM MTO	250MM X 10MM X 2.4M STRIP	20	14-21	 9330221130004
	FC701040-UNIT	HYDROCELL 300MM X 10MM MTO	300MM X 10MM X 2.4M STRIP	20	14-21	 9330221129992

Fosroc Cellflex

Cellflex is a compressible, non-extruding, bitumen impregnated, fibreboard expansion joint filler supplied in sheet form strips.









Typical applications: Used to form and fill expansion joints in in-situ concrete such as pavements and footpaths.

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC700336-UNIT	CELLFLEX 60MM X 9.5MM	60MM X 9.5MM X 2.44M STRIP	 9330221121279
	FC700335-UNIT	CELLFLEX 75MM X 9.5MM	75MM X 9.5MM X 2.44M STRIP	 9330221121286
	FC700312-UNIT	CELLFLEX 100MM X 9.5MM	100MM X 9.5MM X 2.44M STRIP	 9330221121361
	FC700340-UNIT	CELLFLEX 125MM X 9.5MM	125MM X 9.5MM X 2.44M STRIP	 9330221121262
	FC700315-UNIT	CELLFLEX 150MM X 9.5MM	150MM X 9.5MM X 2.44M STRIP	 9330221121330
	FC700325-UNIT	CELLFLEX 200MM X 9.5MM	200MM X 9.5M X 2.44M STRIP	 9330221121309
	FC700330-UNIT	CELLFLEX 300MM X 9.5MM	300MM X 9.5MM X 2.44M STRIP	 9330221121293
	FC700351-UNIT	CELLFLEX 1.22M X 9.5MM	1200MM X 9.5MM X 2.44M SHEET	 9300611680501
	FC761300-UNIT	CELLFLEX 1.22M X 12MM	1.22M X 12MM X 2.2M SHEET	 9330221124393

JOINT FILLERS
& SEALANTS

Fosroc Bond Breaker Tape

Bond Breaker Tape is used in joint sealing applications to ensure sealant only adheres to two faces of the joint. Polyethylene tape for isolating sealant and eliminating adhesion to filler boards

	PRODUCT CODE	DESCRIPTION	SIZE	BARCODE
	FC071061-UNIT	BOND BREAKER TAPE 15MM X 66M ROLL	15MM X 66M ROLL	 9330221123723
	FC071062-UNIT	BOND BREAKER TAPE 20MM X 66M ROLL	20MM X 66M ROLL	 9330221123716
	FC071063-UNIT	BOND BREAKER TAPE 25MM X 66M ROLL	25MM X 66M ROLL	 9330221123709
	FC071064-UNIT	BOND BREAKER TAPE 50MM X 66M ROLL	50MM X 66M ROLL	 9330221123693